
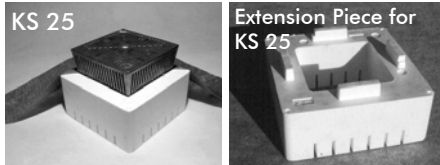


Product Data Sheet

Inspection Chamber KS 15 / KS 25

Order No. 4015 / 4025

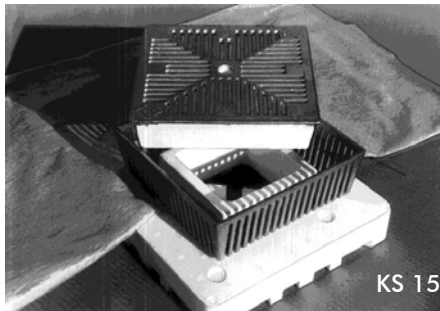

Technical Data

Inspection Chamber KS 15

Order No. 4015

Expanded polystyrene with cast aluminium grating and Detachable cover, with thermally insulating inlay; incl. filter sheet collar.

| | |
|----------------------|------------------|
| External Dimensions: | ca. 320 x 320 mm |
| Grill Dimensions: | ca. 250 x 250 mm |
| Height: | ca. 150 mm |
| Weight: | ca. 1.6 kg |

Inspection Chamber KS 25

Order No. 4025

as above, but

| | |
|---------|------------|
| Height: | ca. 250 mm |
| Weight: | ca. 1.7 kg |

Thermally insulating inspection chamber, for Protection and inspection of roof outlets on thermally insulating extensive and intensive green roofs.

Accessories for KS 25:

Extension Piece

Order No. 4026

Expanded polystyrene, for extension of KS 25 in segments.


| | |
|---------|-------------|
| Height: | ca. 125 mm |
| Weight: | ca. 0.15 kg |

Features

- lightweight construction, suitable for foot traffic
- fits all outlets, up to a 160 mm diameter
- aesthetic cover of cast aluminium
- prevents heat loss due to insulating expanded polystyrene inlay
- safe integration into the filter layer with filter sheet collar
- elevation with additional extension pieces for KS 25

Application Example

"ZinCo DUO-Roof"

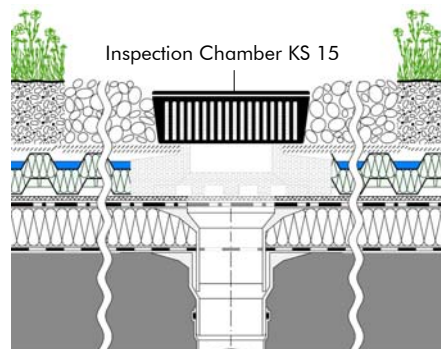

Plant layer

System Substrate "Sedum Carpet"

Filter Sheet SF

Floratherm® WD

Protection Mat SSM 45

Roof construction with root resistant waterproofing and thermal insulation

Specification Suggestion

Inspection chamber of expanded polystyrene; thermally insulated, walkable grating and cover made of cast aluminium, load-bearing capacity Class H according to German Standard DIN 19599, dimensions ca. 320 x 320 mm, grill dimension ca. 250 x 250 mm, with filter sheet collar, delivery and installation according

to manufacturer's instructions.
Height: □ 150 mm □ 250 mm
(KS 15 cannot be extended)

Make: ZinCo Inspection Chamber KS 15 / 25
Enquiries: ZinCo GmbH,
Phone: +49 7022 6003-0