


Product Data Sheet

Irrigation Unit B 32

Order No. 4031

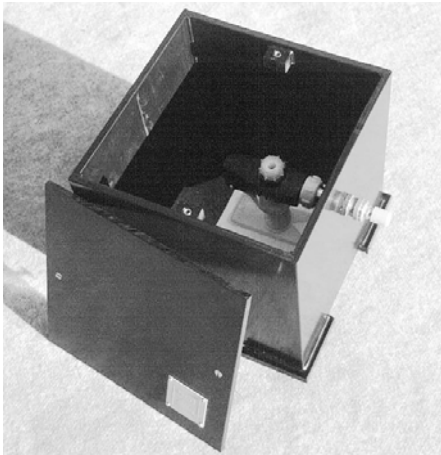

Inspection chamber/Irrigation unit for intensive green roof build-ups.



Technical Data

Irrigation Unit B 32

Made of 100% polyethylene with large, load distributing support footing. Swimmer-controlled valve for automatic dam-up irrigation. Water supply via 1/2" pipe; lockable lid.

Height:	ca. 300 mm
Dimensions:	ca. 300 mm x 300 mm
Weight:	ca. 7.0 kg
Colour:	black
Maximum permissible water pressure:	6 bar (87 psi)
Minimum permissible water pressure:	1.2 bar (17 psi)
Adjustable dam-up height:	ca. 30–100 mm
Adjustment range:	ca. 20 mm

Accessories:

Extension Piece	Order No. 4016
Height:	ca. 150 mm


Also available in stainless steel upon request.

Features

- tested and proven swimmer-controlled automatic irrigation unit
- water-bearing materials made of moisture-resistant components
- durable functionality due to dirt filter in the pipe connection
- easy installation and maintenance
- lockable lid
- large load distributing support footing
- stable plastic body

Application Example

"Roof Garden with FD 60"

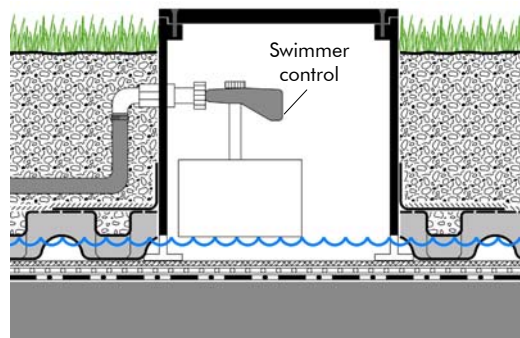

Specification Suggestion

Irrigation unit made of 100% polyethylene, swimmer controlled; lockable lid, maximum permissible water pressure 6 bar (87 psi), minimum permissible water pressure 1.2 bar (17 psi), height ca. 300 mm, Dimensions ca. 300 x 300 mm, delivery and installation

according to manufacturer's instructions including all additional connecting parts.

Make: ZinCo Irrigation Unit B 32
Enquiries: ZinCo GmbH,
Phone: +49 7022 6003-0