

Product Data Sheet

Terrance Grill - vertically adjustable TR-H



Vertically adjustable Terrance Grill, for the installation within terrace surfaces.

Technical Data

Walkable, vertically adjustable grill made of galvanized steel, plastic coated, slotted gravel retainer. Grill height to be adjusted with a screwdriver from the top insitu. Grill sizes adjusted to common slab sizes.

Grill: Galvanized steel, mesh width ca. 33 x 12 mm
 Gravel retainer: Plastic coated galvanized steel with lateral slots, old silver in colour, slot width ca. 4 mm, height ca. 65 mm or e.g. 95 mm for type "TR-H 40 x 40 - 95"

Terrace Grill TR-H 20 x 40 **Order No. 4402**
 External dimension 200 x 400 mm, adjustment range ca. 65-95 mm

Terrace Grill TR-H 50 x 50 **Order No. 4405**
 External dimension 500 x 500 mm, adjustment range ca. 65-95 mm

Terrace Grill TR-H 40 x 40
 External dimension 400 x 400 mm, available in two variations:
 Type "65", adjustment range 65-95 mm **Order No. 4404**
 Type "95", adjustment range 95-125 mm **Order No. 4409**

Accessories:


Extension Piece **Order No. 4407**
 each Terrace Grill type TR-H 40 x 40 can be extended by 60 mm and, therefore, used on surfaces with 185 mm in total height.

Features

- dimensions adjusted to common slab sizes
- dual drainage: from the surface and waterproofing level
- vertically adjustable from the top, insitu
- gravel retainer with large load-distributing supporting surfaces.
- Terrace Grill TR-H 40 x 40 available in two different heights with extension pieces; possible installation within surfaces of 185 mm in total height

Application Example

"Terrace surface on FD 40"

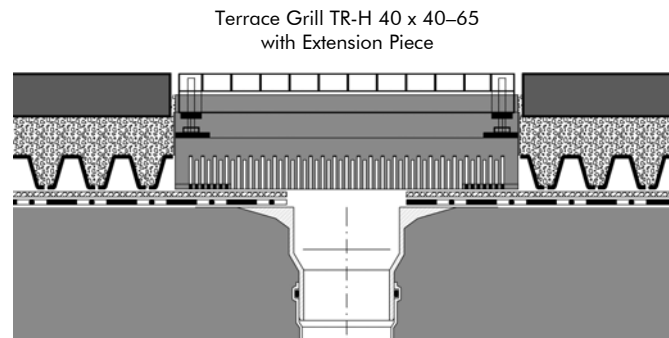

Specification Suggestion

Vertically adjustable drainage grill of galvanized steel; walkable, lateral slotted gravel retainer made of plastic coated galvanized steel, vertically adjustable insitu, delivery and installation according to manufacturer's instructions.

Size: 400 x 400 mm 200 x 400 mm
 500 x 500 mm
 Build-up height: ca. mm

Make: ZinCo Terrace Grill TR-H
 Enquiries: ZinCo GmbH,
 Phone: +49 7022 6003-0